



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification<sup>6</sup> :

F16F

A2

(11) International Publication Number:

WO 99/50568

(43) International Publication Date:

7 October 1999 (07.10.99)

(21) International Application Number: PCT/TR99/00017

(22) International Filing Date: 25 March 1999 (25.03.99)

(30) Priority Data:

98/603

1 April 1998 (01.04.98)

TR

(71) Applicants (for all designated States except US): ARÇELİK A.Ş. [TR/TR]; E5 Ankara Asfaltı Üzeri, Tuzla, 81719 İstanbul (TR). AKSİSTEM ELEKTROMEKANİK SANAYİ VE TİCARET LTD. ŞTİ. [TR/TR]; İmes Sanayi Sitesi C.308 No. 28, Ümraniye, 81260 İstanbul (TR).

(72) Inventors; and

(75) Inventors/Applicants (for US only): UGURKAN, Altan [TR/TR]; Arçelik A.Ş., E5 Ankara Asfaltı Üzeri, Tuzla, 81719 İstanbul (TR). KANIÖZ, Adil [TR/TR]; Aksistem Elektromekanik Sanayi ve Ticaret Ltd. Şti., İmes Sanayi Sitesi C.308 No. 28, Ümraniye, 81260 İstanbul (TR).

(74) Agent: ANKARA PATENT BUREAU LTD.; Sehit Adem Yavuz Sokak 8/22, Kizilay, 06440 Ankara (TR).

(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).


## Published

Without international search report and to be republished upon receipt of that report.

(54) Title: A FRICTION VIBRATION DAMPER

## (57) Abstract

In the damper of the invention, consisting of a tubular body (1) and a coaxial piston rod (13) slidably disposed inside the said body (1), a graduation (7) has been formed. In addition to this graduation (7) which causes an enlargement of the body diameter, a second graduation (17) is provided at the lower end of the pipe. Two friction elements (8, 32) are placed between these graduations (7, 17) with defined internals between them. Two oiling rings (segments) (9, 10), placed between the said friction elements (8, 32) provide the reduction of the friction heat generated during the operation of the damper. The generated heat, furthermore, is discharged through two rectangular ventilation openings (30, 31) opened on the tubular body, thus the cooling of the piston rod (13) is facilitated. The oiling rings (9, 10) serve as the oil reservoirs by forming the necessary oil reserve cell (11) between the upper (8) and lower friction elements (32) while at the same time they prevent the friction elements (8, 32) to move towards each other, thus keeping the distance between the said elements, unchanged.

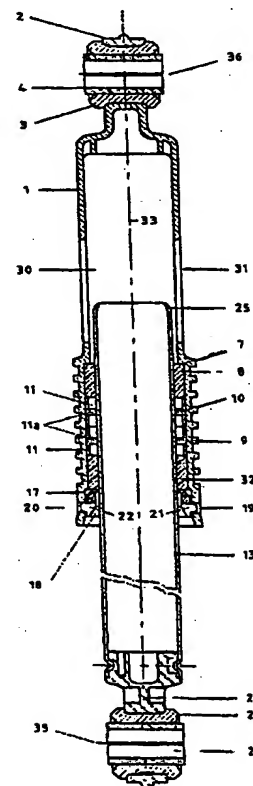

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

## A FRICTION VIBRATION DAMPER

The present invention relates particularly to a friction vibration damper used in washing machines provided with a rotating drum.

The friction dampers used in washing machines, in general, are the elements damping out the vibrations which occur due to unbalance at the beginning or end of the rotation, or acceleration and/or deceleration of the machine drum, by means of the compression force created by one or two friction elements compressed between two telescopic pipes or similar parts. The referred dampers can be classified in to two groups according to the operating position of the friction element. The first group functions by the friction of the outer surface of a ring-like piece formed by a cellular sponge-like plastic material to the inner surface of a pipe. The second group consists of those dampers wherein the inner surface of the said annular friction ring is in friction with the outer surface of a pipe. In both types of the damper, frictional heat which in turn leads to a reduction in performance by the course of time, occurs.

The object of the present invention is to provide a friction damper of the latter type, which comprises two identical oiling segments used to minimize the frictional heat created by the friction of the inner surface of the friction element to the outer surface of a pipe, and due to the provided heat reduction, which can operate for a long period without any problems, as well as which can be produced less expensively due to the improvements in the manufacturing activities .

In the following description, the friction vibration damper realized in order to attain this object of the invention has been described with reference to the attached drawings, wherein:

Figure 1, is the cross-section view of the friction damper;

Figure 2, is the view of one of the oiling segments as removed from the mould;

Figure 3, is the view showing the two oiling segments side-by-side and ready for  
5 mounting;

Figure 4, is the side view of the lock-segment,

Figure 5, is the top view of the lock-segment.

10

The friction vibration damper consists of a tubular body (1) and a plunger piston rod (13) moving co-axially (33) in and with the said tubular body (1). Two friction elements (8,32) of a sponge-like cellular, plastic material are inserted between the inner surface of the tubular body (1) and the outer surface of the  
15 piston rod (13) with a certain distance to each other in such a manner that they move together with the tubular body (1). In the gap between the friction elements, two identical oiling segments (9,10) are placed. The damper of the invention, is connected to the tub and the cabinet of the washing machine by means of the ball-and-socket joints (2,3,4,26,28,29) placed on the respective ends of the inner  
20 (13) and outer (1) pipes, with axes (35,36) vertical to the axis of the damper.

The tubular body (1) is made of plastic material and a head bearing (2) is formed on its upper end in order to provide a resilient connection with the washing machine. In the said bearing (2) a rubber or plastic bush (3) which also contains a  
25 steel or plastic bush (4), is attached.

The piston rod (13) is made of a steel pipe, one end (25) of which is rounded towards the axis of the pipe (33) to facilitate the assembly. Whereas the other end of which is provided with a plastic cap (26). This plastic cap (26) which is fixed at  
30 its placed by shrinking and narrowing this end of the piston rod (13), serves to provide the connection of the pipe to the washing machine cabinet by means of an

elastic connection. Inside the plastic cap (26), an elastic bush (28) is placed with an axis vertical to that of the tubular body (1), which in turn contains a steel or hard plastic bush (29) to provide the suitable connection to the washing machine. The piston rod (13) operate within the friction elements (8,32) while moving  
5 slidably to and fro inside the tubular body (1) depending on the vibrations created due to the unbalanced movements of the drum of the washing machine.

An enlargement in the diameter of the body has been provided by means of a graduation (7) (step) formed on the portion towards the middle of the tubular body  
10 (1). This graduation (7) prevents the entry of the friction elements (8,32) to the narrowing upper portion of the tubular body. On this portion with a relatively larger diameter, respectively, an upper friction element (8) fitted on its place as a ring, two identical oiling segments (9,10) and a lower friction element (32) which is similar to the upper element (8), are placed sequentially on the inner surface of  
15 the lower end of the tubular body (1), and a second graduation (17) is formed. The friction elements (8,32) and two oiling segments (9,10) placed annularly around the piston rod (13), starting from the first graduation (7) are locked to be held together on the tubular body (1) by means of a locking segment (18) provided on the second graduation (17). Consequently, all of these elements act as one piece  
20 and they cannot move individually. All of these elements move together with the tubular body (1) and on the outer surface of the piston rod (13) inserted through the lower portion of the tubular body (1).

The locking segment (18) made of an elastic and durable plastic material, is placed at the lower end of the tubular body (1) in such a  
25 manner that it will apply pressure on the second friction element (32) and this process is achieved by engaging the two claws (21,22) on the locking segment (18) to the holes (19,20) on the tubular body (1). In order to fit the locking segment (18) in its place, two slots (23,24) are formed on the sides of each claw  
30 (21,22). By means of extra flexibility provided due to these slots (23,24), the

claws (21,22) can engage to the the holes (19,20) on the tubular body (1) more easily, by this way, the fitting of the locking segment (18) has been facilitated.

5 The oiling segments (9,10) have been superposed just below the upper friction element (8). These parts are made of a plastic material, by way of plastic injection moulding and acquired in the form of a ring (Fig 2). These two parts (9,10) are placed side by side so that they encored the outer surface of the piston rod (13) (Fig. 3) . Thus the two identical parts form an oiling means. The diameter of the oiling segments (9,10) is provided in appropriate dimensions to be fitted in the  
10 tubular body (1).

The oiling segments (9,10) inserted between the friction elements (8,32) comprise projections (11a) to help the retaining of the oil. The said segments (9,10) provide the reduction of the friction heat created during the operation of the  
15 damper and its distribution above the metallic piston rod (13), due to the oil contained in the cells (11) formed by these projections (11a). The created heat is also discharged through two rectangular ventilation openings (30,31) on the tubular body (1) and the cooling of the piston rod (13) is thus facilitated. The ventilation openings (30,31), at the same time, prevent the compression of the air  
20 in the damper during the vibratory and to-and-fro movements of the piston. The oiling segments (9,10) function as the oil tank by forming the required oil cell (11) space between the upper (8) and lower friction (32) element and they also prevent the approaching movements of the friction elements (8,32) towards each other thus keeping the distance between them unchanged.

25

When the piston rod (13) is fitted in its place the oiling cells (11) formed between the oiling segments (9,10) and the friction elements (8,32) completely encircle the said pipe. These cells (11) provide the lubrication of the piston rod (13) while operating and also provides the dispersion of the heat generated due to friction,  
30 above the pipe. The damper of the invention provides the desired friction force within the permitted tolerance limits, during its service life.

## CLAIMS

1. A friction vibration damper used to dampen out the vibrations generated by the drum of the washing machines, comprising a plastic tubular body (1) and a metallic piston rod (13) supported by two friction elements (8,32) inside the said pipe (1) moving coaxially with the enveloping plastic pipe (1); characterized in that it is connected to the washing machine tub and cabinet, with axes vertical to the damper axis by means of the ball-and-socket joint elements (2,3,4,26,28,29) placed at the outer ends of the inner (13) and outer (1) pipes; and that the friction heat created due to friction is reduced by dispersing the heat above the piston rod (13) by means of the oil provided in the oiling cells (11) formed by the oiling segments (9,10) encircling the piston rod, placed between the two friction elements (8,32) and that the said heat is discharged out through the ventilation openings (30,31) opened on the outer pipe (1).
2. A damper according to claim 1, characterized in that the distance between the upper (8) and the lower friction element (32) is kept constant by means of the oiling segments placed in this space and thus the movement of the said friction elements towards each other is prevented.
3. A damper as claimed in Claims 1 and 2, characterized in that there are two identical oiling segments.
4. A damper as claimed in Claims 1 to 3, characterized in that the said oiling segments comprise projections (11a) serving to retain the oil.
5. A damper according to Claim 4, characterized in that the oiling cells are placed between the said projections (11a) and the friction elements (8,32).

6. A damper according to Claims 1 to 5, characterized in that the oiling segments are placed inside the plastic pipe in the shape of an unclosed ring in such a manner that these segments are between the friction elements.
- 5 7. A damper according to Claims 1 to 6, characterized by two graduations (7 and 17) providing an enlargement of the body diameter; first of them being at the middle portion of the tubular body and the second, at the lower end of the same body.
- 10 8. A damper according to Claim 7, characterized in that the friction elements and the oiling segments are placed around the piston rod, in such a manner that they are placed between the first and second graduations, and they move together with the tubular body.
- 15 9. A damper according to Claims 7 and 8, characterized in that the friction elements and the oiling segments placed around the piston rod, starting from the first graduation, are locked to be held together on the tubular body by means of a locking segment (18) provided on the said second graduation.
- 20 10. A damper according to Claim 9, characterized in that the locking segment is fitted on its place at the lower end of the tubular body so that it applies pressure on the second friction element (32) and that this process is realized by engaging the two claw projections (21,22) on the locking segment, to the holes (19,20) on the tubular body.
- 25 11. A damper according to Claim 9 and 10, characterized in that the increased resilience of the claws (21,22) during the assembly process is provided by forming two slots (23,24) each on the sides of each claw (21,22), in order to facilitate the fitting of the locking segment (18).
- 30



12. A damper according to Claim 1 to 11, characterized in that the ventilation openings are rectangular.

13. A damper according to Claim 1 to 12, characterized in that the end (25) of the  
5 piston rod that remains inside the tubular body is rounded towards the pipe axis (33) in order to facilitate the mounting of the piston rod in its place.

1/1

FIGURE 1

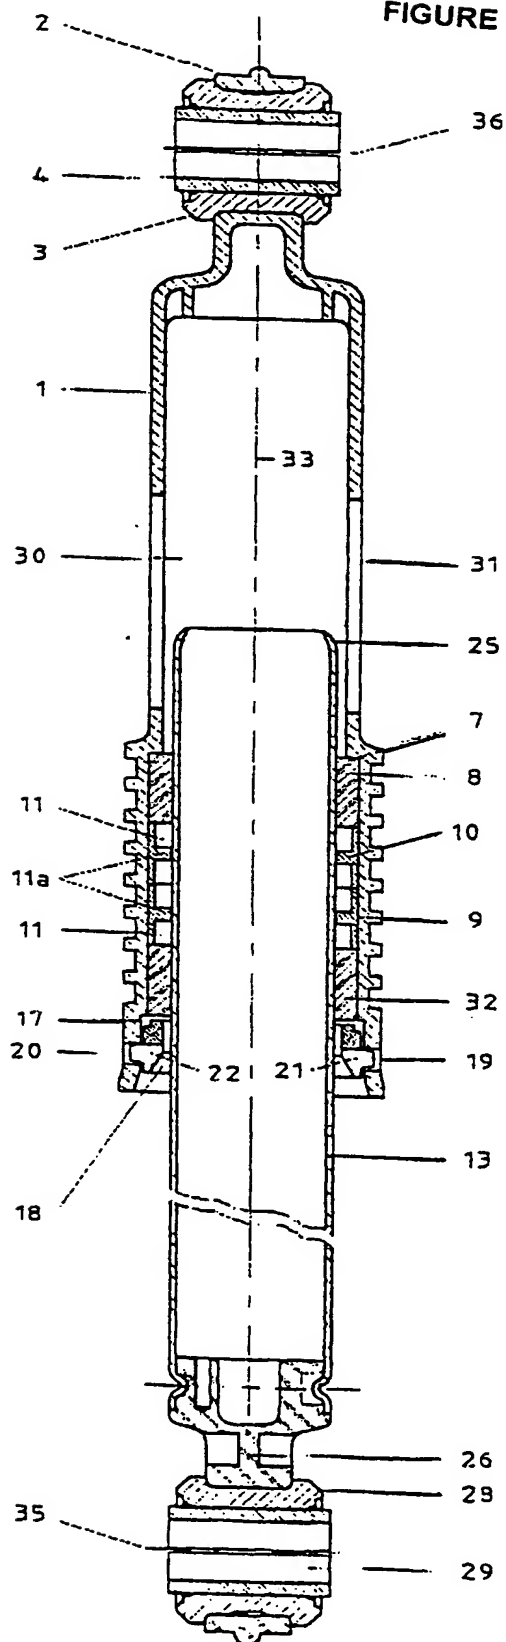


FIGURE 2




FIGURE 3




FIGURE 4





FIGURE 5





## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification<sup>6</sup> :

D06F 37/20

A3

(11) International Publication Number:

WO 99/50568

(43) International Publication Date:

7 October 1999 (07.10.99)

(21) International Application Number: PCT/TR99/00017

(22) International Filing Date: 25 March 1999 (25.03.99)

(30) Priority Data:

98/603

1 April 1998 (01.04.98)

TR

(71) Applicants (for all designated States except US): ARÇELİK A.Ş. [TR/TR]; E5 Ankara Asfaltı Üzeri, Tuzla, 81719 İstanbul (TR). AKSİSTEM ELEKTROMEKANİK SANAYİ VE TİCARET LTD. ŞTİ. [TR/TR]; İmes Sanayi Sitesi C.308 No. 28, Ümraniye, 81260 İstanbul (TR).

(72) Inventors; and

(75) Inventors/Applicants (for US only): UGURKAN, Altan [TR/TR]; Arçelik A.Ş., E5 Ankara Asfaltı Üzeri, Tuzla, 81719 İstanbul (TR). KANIÖZ, Adil [TR/TR]; Aksistem Elektromekanik Sanayi ve Ticaret Ltd. Şti., İmes Sanayi Sitesi C.308 No. 28, Ümraniye, 81260 İstanbul (TR).

(74) Agent: ANKARA PATENT BUREAU LTD.; Sehit Adem Yavuz Sokak 8/22, Kizilay, 06440 Ankara (TR).

(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

## Published

With international search report.

Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.


(88) Date of publication of the international search report:

2 December 1999 (02.12.99)

(54) Title: A FRICTION VIBRATION DAMPER

## (57) Abstract

In the damper of the invention, consisting of a tubular body (1) and a coaxial piston rod (13) slidably disposed inside the said body (1), a graduation (7) has been formed. In addition to this graduation (7) which causes an enlargement of the body diameter, a second graduation (17) is provided at the lower end of the pipe. Two friction elements (8, 32) are placed between these graduations (7, 17) with defined internals between them. Two oiling rings (segments) (9, 10), placed between the said friction elements (8, 32) provide the reduction of the friction heat generated during the operation of the damper. The generated heat, furthermore, is discharged through two rectangular ventilation openings (30, 31) opened on the tubular body, thus the cooling of the piston rod (13) is facilitated. The oiling rings (9, 10) serve as the oil reservoirs by forming the necessary oil reserve cell (11) between the upper (8) and lower friction elements (32) while at the same time they prevent the friction elements (8, 32) to move towards each other, thus keeping the distance between the said elements, unchanged.

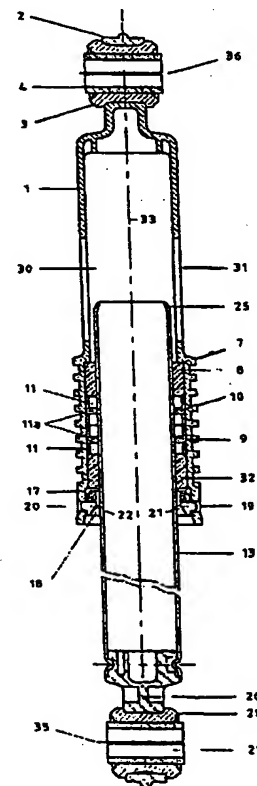

**Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.**

NSN 750-017-0000 98E0569A2 1 2

# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/TR 99/00017

## A. CLASSIFICATION OF SUBJECT MATTER

IPC<sup>6</sup>: D06F 37/20

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC<sup>6</sup>: D06F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

Derwent WPI; EPODOC

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 487 311 A1 (KABUSHIKI) 27 May 1992 (27.05.92) fig 2; column 2, lines 47-55.	1-13
A	EP 0 686 720 A1 (SUSPA) 13 December 1995 (13.12.95) fig 3; column 4, line 11, column 5, line 19.	1-13
	----	

☐ Further documents are listed in the continuation of Box C.

☐ See patent family annex.

\* Special categories of cited documents:

„A“ document defining the general state of the art which is not considered to be of particular relevance

„E“ earlier application or patent but published on or after the international filing date

„L“ document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

„O“ document referring to an oral disclosure, use, exhibition or other means

„P“ document published prior to the international filing date but later than the priority date claimed

„T“ later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

„X“ document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

„Y“ document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

„&“ document member of the same patent family

Date of the actual completion of the international search

15 October 1999 (15.10.99)

Date of mailing of the international search report

22 October 1999 (22.10.99)

Name and mailing adress of the ISA/AT

Austrian Patent Office  
Kohlmarkt 8-10; A-1014 Vienna  
Facsimile No. 1/53424/200

Authorized officer

Huber

Telephone No. 1/53424/313

## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/R 99/00017

The **EP 487 311 A1** describes a vibration damper assembly for a washing machine comprising a cylinder and a piston rod inserted in the cylinder through an oil seal and a rod guide that are disposed at one end of the cylinder. The piston rod supports on its end inside the cylinder a piston fixed to the piston rod and slidably held against the inner peripheral surface of the cylinder. The piston divides the interior spaces of the cylinder into two oil chambers.

The **EP 686 720 A1** discloses a frictional damper for spinner-type washing machines comprising a housing and a tappet, which is coaxially displaceable within the latter and the inner end of which is provided with a damping piston. The damping piston is disposed on a piston-bearing section of the tappet to be displaceable between biased compression springs bearing against stops, and provided with a friction lining elastically pressed against the inside wall of the housing.

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.  
PCT/TR 99/00017

Im Recherchenbericht angeführtes Patentedokument Patent document cited in search report Document de brevet cité dans le rapport de recherche	Datum der Veröffentlichung Publication date Date de publication	Mitglied(er) der Patentfamilie Patent family member(s) Membre(s) de la famille de brevets	Datum der Veröffentlichung Publication date Date de publication
EP A1 487311		keine - none - rien	
EP A1 686720	13-12-1995	DE A1 4419870 DE C0 59501747 EP B1 686720 ES T3 2114247 JP A2 7332418 US A 5549182	14-12-1995 07-05-1998 01-04-1998 16-05-1998 22-12-1998 27-08-1996

**THIS PAGE BLANK (USPTO)**